

Thank you for purchasing a vanity from


Henry Brooks & Co Ltd

Ph: 09 913 3110

Fax: 09 913 3113

[sales@henrybrooks.co.nz](mailto:sales@henrybrooks.co.nz)

[www.henrybrooks.co.nz](http://www.henrybrooks.co.nz)

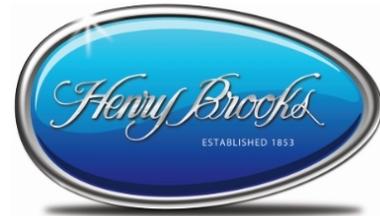

## Drawer front Replacement & Adjustment

for the Henry Brooks Strata Duo, Strata Quad and Albion Vanities.



### Changing of Drawer Fronts from White to Wood-grain.

You will have received your new vanity complete with white drawer fronts, plus a box with the substitute wood-grain drawer fronts (if ordered).


There will either be 2 or 4 drawer fronts in your box along with either 2 or 4 grey plugs you will also need, these plugs are used on the lower drawers where the tubular side rail is installed.

I suggest you have the drawer fronts changed as part of the vanity install as it is easier to do with the vanity mounted in place and part of the vanity install involves re-mounting the drawer handles anyway.



To replace the drawer fronts you DO NOT need to remove the drawer from the vanity.

Follow the steps shown below – the screw under the drawer can be removed without removing the drawer.

#### Locking Screw

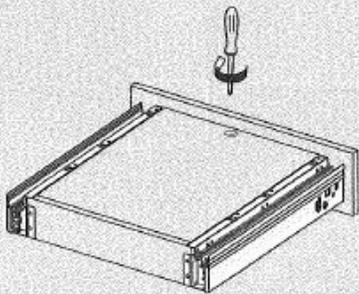


#### Removing the drawer fronts

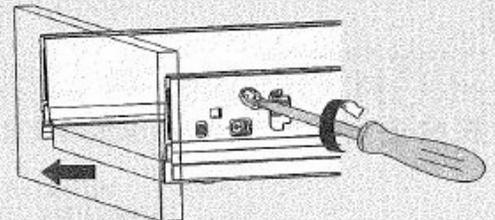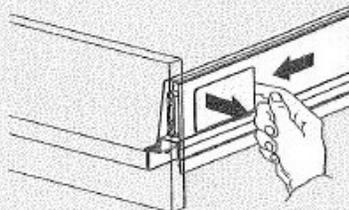

1. First loosen the screw underneath the drawer ( no need to remove drawer)
2. remove covers off both sides of the drawer (as shown)
3. Locate the screw in the curved slot on both the left and right sides of each drawer then turn to unlock and the front of the drawer will become free.


Once you have the drawer front removed you can then remove the hardware from the drawer front. On both drawers there are 3 items to move across to your wood-grain drawer fronts. Make sure you have the correct new front first, by matching the screw hole positions. On the new bottom wood-grain drawer front(s) you will need to insert the grey plastic plugs into the matching holes on the inside of the drawer fronts.

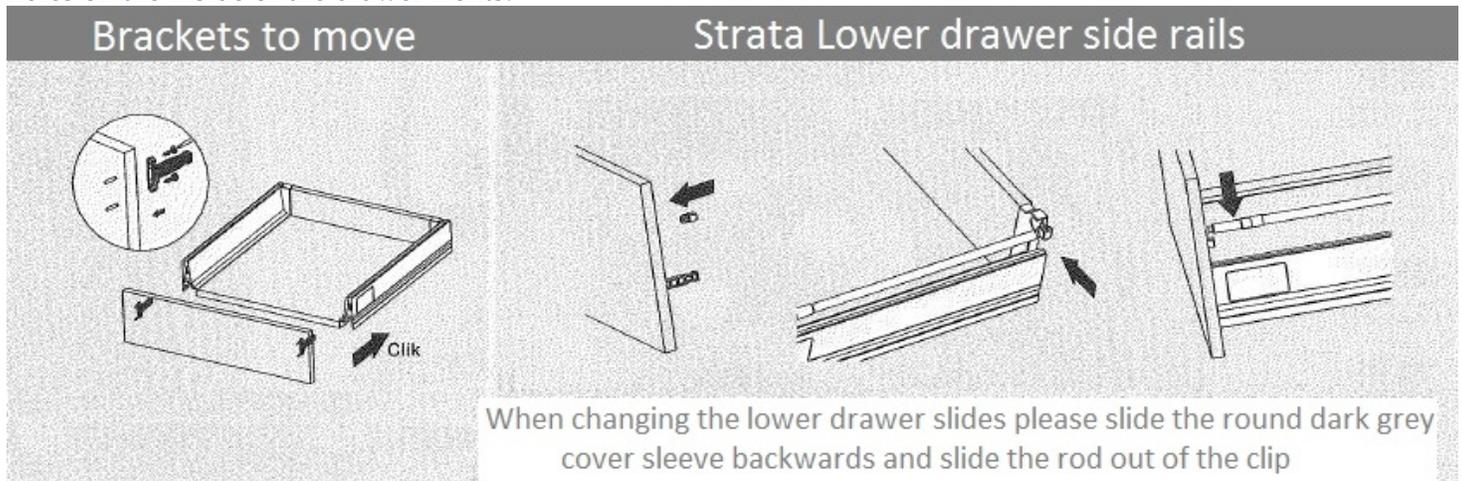

Once you have changed over the items and installed the plugs where need be, line up the 3 items with the matching holes, hold the new drawer front in place lining up the 3 holes and push, they will lock into place then all you need to do is screw up the locking screw under the drawer.


## Adjusting the Drawers

There are only 3 screws per drawer to adjust. Remove the Left and R/hand covers on the drawer you want to adjust. There are 2 screws on the R/H side and 1 on the L/H side that you can adjust.

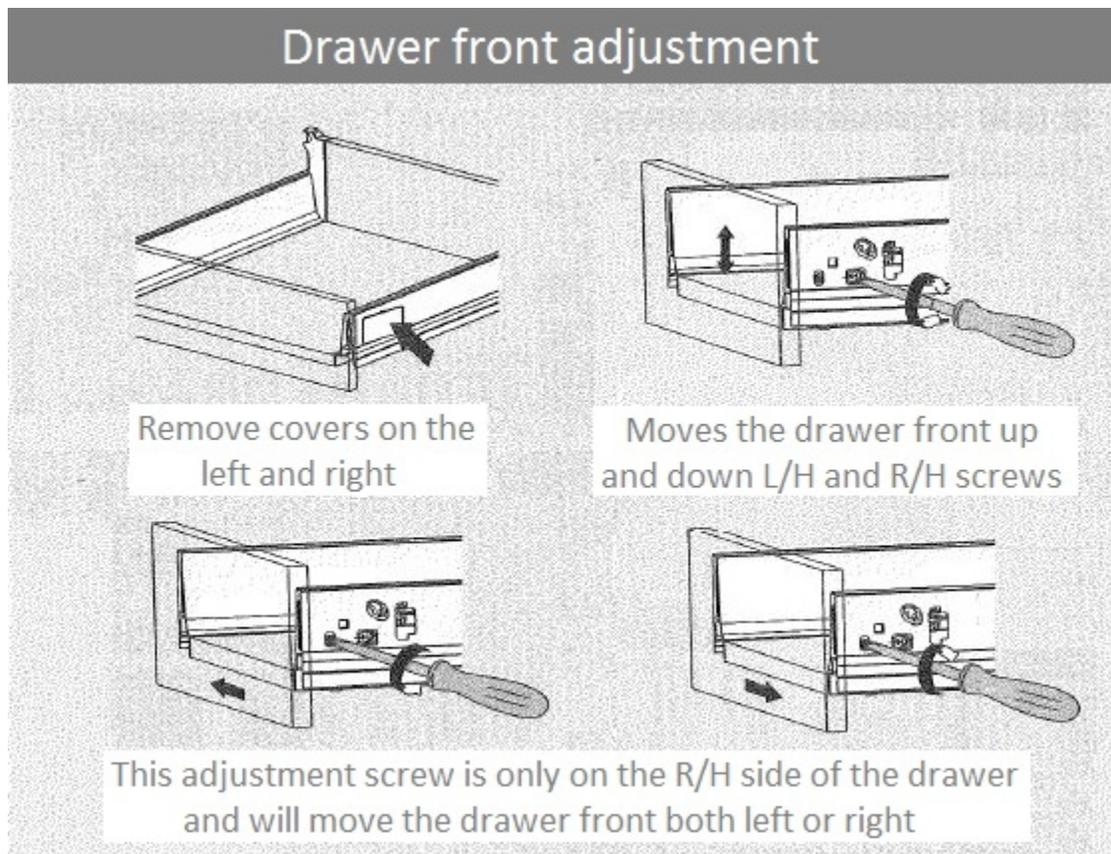

## Removing Drawer from the Drawer Slides

Remove the Left and R/hand covers on the drawer you want to remove.

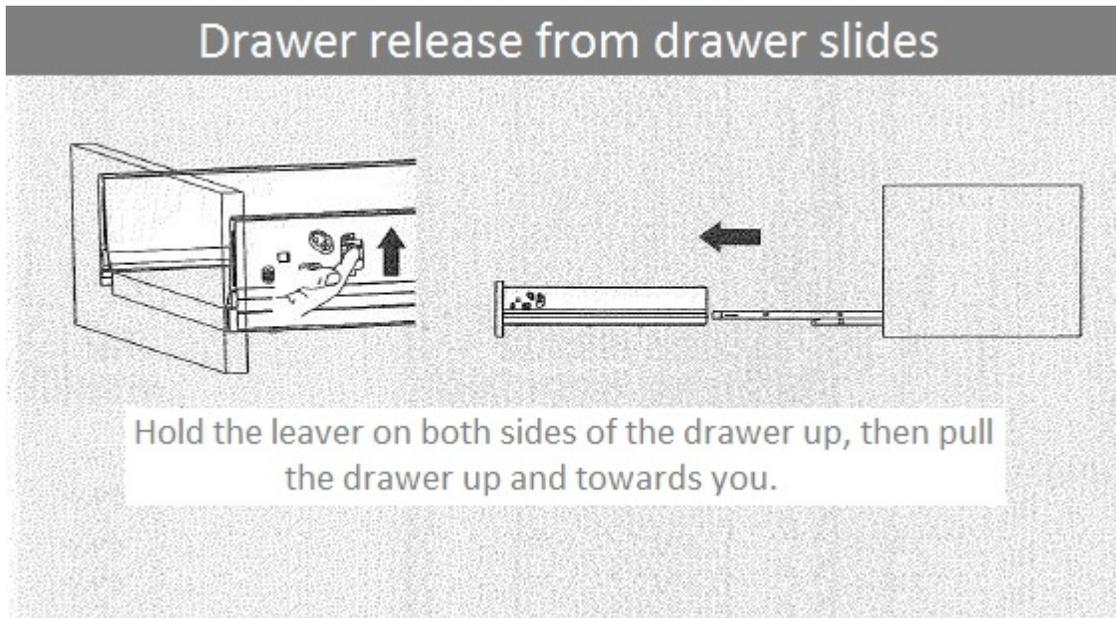

To reinstall the drawer pull both drawer slides fully out, place the drawer onto the slides and simply push the drawer fully into the vanity cabinet, an audible click should be heard. Then pull out the drawer to check for proper operation.

## Cleaning your Vanity

Please clean your **vanity** with a soft cloth and warm water. A spray on window cleaner and soft cloth can be used to remove light marks.

**Under no circumstances should any form of abrasive cleaners be used.**

### **TO THE OWNER:**

**Please retain these instructions for future reference**

**If you have any questions regarding installation or maintenance of any of our products, please contact**

**Henry Brooks & Co Ltd**

**Ph: 09 913 3110**

**Fax: 09 913 3113**

**[sales@henrybrooks.co.nz](mailto:sales@henrybrooks.co.nz)**

**[www.henrybrooks.co.nz](http://www.henrybrooks.co.nz)**

