



Freestanding Spa Bath Guide

**For all Henry Brooks Freestanding Spa Bath installations.
BTW (Back to Wall), Corner and Freestanding Spa baths.**

**The popup waste supplied with the bath is loosely fitted.
If you intend to use the supplied waste, we recommend your plumber removes
and completely seals and installs it.**

Back to Wall



Corner Spa Baths



All these Spa Baths come complete with Frame, adjustable feet.

Motor is 750watt
can be installed with 10amp cabling

Electrically, these need to be installed to the NZ electrical regulations.
We recommend the installation of an Isolating switch for all the Spa Baths.

NOTE: There is an air tube running from the button to the motor.
Please confirm this is connected before final installation. (with power off can you hear the air
switch turning on and off)

Recommended Waste installation for our BTW (Back to Wall), Corner and Freestanding Spa baths



This waste replaces the std bath waste and gives you a waste and trap that is all in one and is the easiest way to fit a trap to your freestanding bath enabling the installation to meet plumbing regulations..

The Installation is very simple, replace the std bath waste with this unit, and seal in your usual manner.

Attach the flexible pipe (included with bath) to the trap and fit to your waste pipe coming through the floor with an elbow.


These spa bath wastes can be bought from our [website here](#)

Please note

All pumps and motors are enclosed within the Spa bath.

To service them you either need to allow for an inspection panel on the back or side wall into another room or ensure the spa bath can be removed for servicing.

The recommended position of the floor waste is to either side of the bath waste, this enables you to place the floor waste where it suits best allowing for floor joists etc. Install the floor waste in either of the 2 blue marked areas below. All of our baths come with a good quality flexible waste, in some cases you may need to source a flexible pipe from a plumbing merchant for your specific installation.

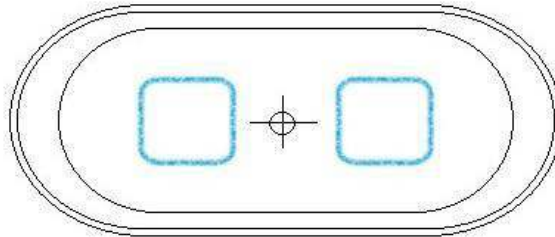

Installation Instructions:

Unpack the bath from its packaging and check for any transport damage. Report any damage to the supplier immediately and do not install the product.

Once you have all the plumbing and electrical services installed, place the spa bath in the desired position and adjust the leveling feet to suit your location so that the bath is level.

Tighten the adjustable feet bolts and fit the flexible hose to the bath waste outlet.

Note There is an air tube running from the bottom of the motor to the back of the air switch on the top side of the bath.

Please check this is securely connected at both ends before final installation. This can be checked by pressing the air switch button (with power OFF).

If you can hear the air switch turning on and off, all is good. Plug in the electrical lead to the wall socket.

Remember to switch the power on, then, insert the flexible waste hose to the installed waste pipe and place the bath back into the final resting place.

We suggest joining the bath to the finished wall surface with a fine bead of high quality anti mould silicone sealant (not supplied)

If the bath ever needs servicing, this bead of silicone can be cut, and the bath removed for servicing.

Congratulations all is now finished.

Steps to test the Spa Bath:

Check that each of the jets, like the one on the right, has the center section turned to the left (anti clockwise) to make sure water can flow.

Fill the bath to a minimum of 100mm above the jets, make sure the isolating switch is on then turn on the Sap Bath.

Please note: As with all Spa Baths it is recommended that you do not use the Spa without the water level being a minimum of 100mm above the jets.

Cleaning your Bath:

Please clean your **Freestanding Spa Bath** with a soft cloth and warm water. A spray on window cleaner and soft cloth can be used to remove light marks. Heavier marks can be removed with liquid jiff and a soft cloth, followed by a spray on window cleaner and soft cloth.

Under no circumstances should any form of abrasive cleaners be used.

TO THE OWNER:

Please retain these instructions for future reference

If you have any questions regarding installation or maintenance of any of our products, please contact

Henry Brooks

Ph: 09 9133-110

sales@henrybrooks.co.nz

henrybrooks.co.nz

